

1. ELASTIC SUBLAYER



→ 1. Elastic sublayer

2. SEALING


The purpose of the first of three synthetic layers moulded onto the elastic sublayer is to create a seal.



→ 2. Sealing

3. BASE LAYER

The second layer is applied thinly, as a final preparation of the floor for the installation of the thicker self-levelling layer that provides mechanical strength to the floor. This moulded synthetic layer provides a solid base and proper fit with walls and floor facilities.



→ 3. Base layer


4. MOULDED TOP LAYER



→ 4. Moulded top layer

5. FINISHING

Pulastic sports floors derive their very high wear resistance and matt finish from the final water-based sports floor coating. This coating is available in a wide range of classic colours, design colours and bespoke colours. The Pulastic sports floor coating is considered the state of the art worldwide.

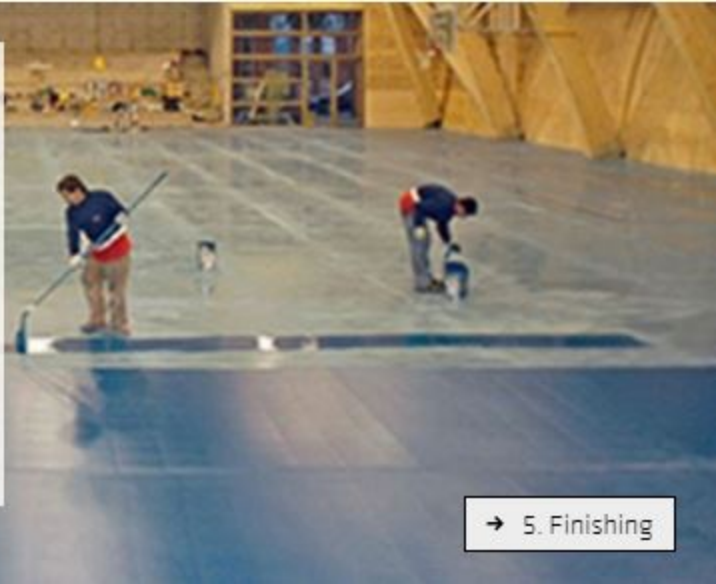

→ 5. Finishing

6. LINE MARKING AND LOGOS

The finishing touch for every sports floor is the line marking, applied by our line marking specialists. At this stage, any logos may also be applied.



→ 6. Line marking and logos

FINISHED SPORTS FLOOR

LANX

→ Finished sports floor

